


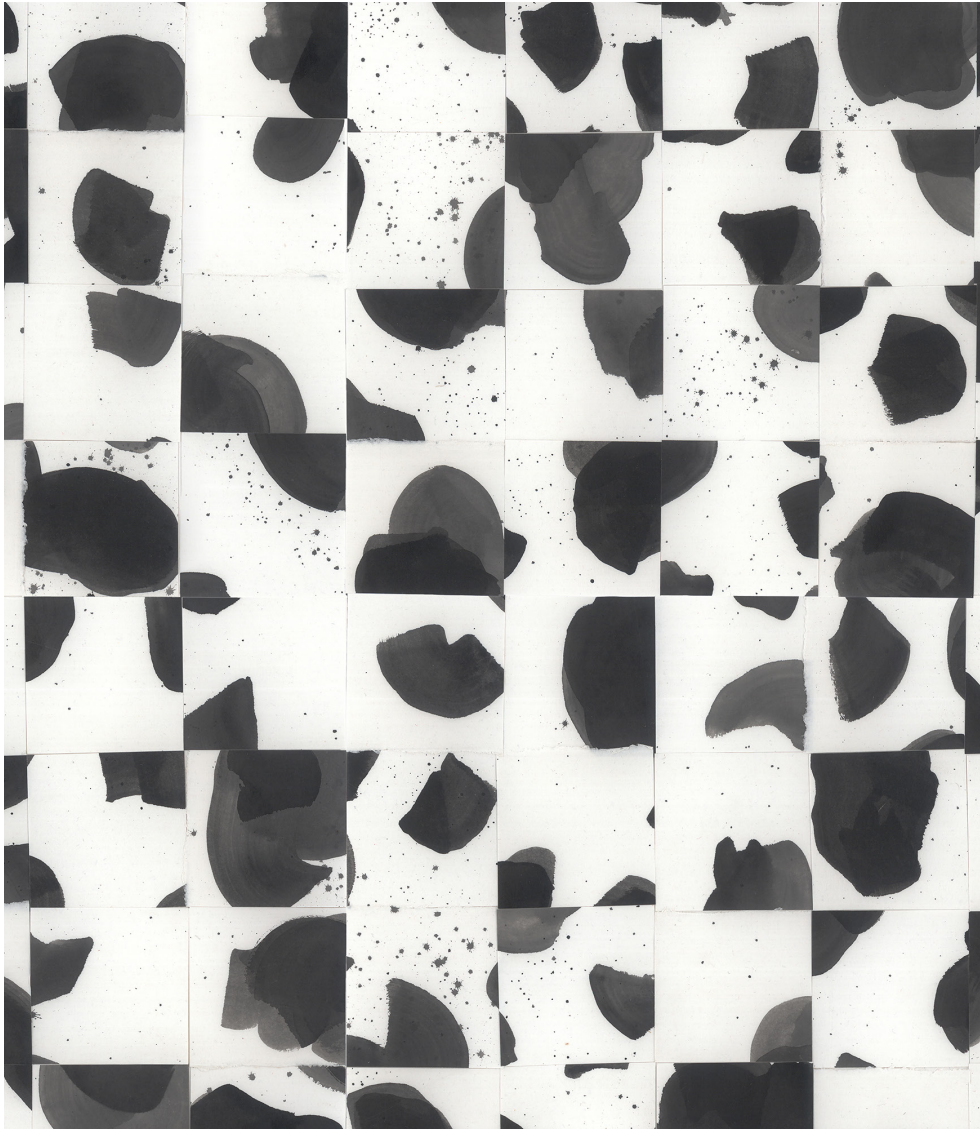

Aléatoire Sand



*image does not show full repeat

Substrate Properties

Material

Eco-friendly digitally printable wallcovering. 31% post-consumer recycled content.
Permeable surface allows transfer of moisture to minimize possibility of mold and mildew growth.
Thickness: 22 mil.
Weight: 20 oz per linear yrd
Roll size: 54" w (printable up to 52" w)
Packaging: 3" heavy-duty core.

Federal Certifications

TYPE II - Meets or exceeds federal specification CCCW-408D
W-101 Type II Class A

Fire Test Ratings

ASTM-E84 Tunnel Test Class A
Tunnel test NFPA-101. Passed all requirements

Environmental

LEED Eligibility: Can contribute toward earning up to 7 LEED credits.
MR Credit 4.1 Recycled content 10%
MR Credit 4.2 Recycled content 20%

Conditionally:

MR Credit 2.1 Contribution to project recycling program
MR Credit 2.2 Contribution to project recycling program
MR Credit 5.1 Manufactured local to the new construction
EQ Credit 4.1 When mounted with use of low emitting adhesives
EQ Credit 4.6 Contribution to low VOC emitting wall construction

Note: ALL LEED credits are based on the total construction of a building. Substrate offers up to a 50% advantage over competitive products for achieving MR Credit 4.1 and MR Credit 4.2 because of its higher percentage of post-consumer recycled materials.

Made with low VOC vinyl Tested per CA-1350 Air Quality Standards
Cadmium and Lead Free Formulation